

KUBO

Sound-absorbing element upholstered in fabric. It can be hung from the ceiling by adjustable cables.

COMPOSITION

Sound-absorbing material

Inner sound-absorbing padding 400-500 mm thick realised in Basotect® melamine resin by Basf® (8,5-11,5 Kg/m³).


Fabric

Oeko-Tex certified removable fabric covering, 100% Polyester FR - (Tr Cs). Colours as in colour chart. High-resolution and custom fabric print with non-toxic and water-based inks resistant to washing, which do not alter the fabric sound-absorbing properties and elasticity.

CERTIFICATIONS


- Sound absorption tests in compliance with UNI EN ISO 354
- Fire resistance tests
- Formaldehyde test: EN 717-1:2004 mg/mc < 0,01 – pm < 0,01
- UNI EN 13501-01 ClassB-s2, d0

ACOUSTIC ABSORPTION

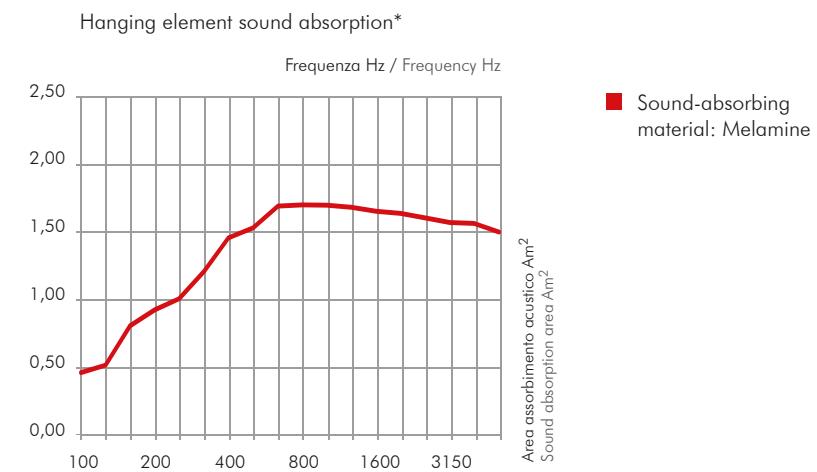

* Sound absorption tests in compliance with UNI EN ISO 354 performed on 50 x 50 x 50 cm standard element


DIMENSIONS




Special measures on request/ project basis

MAINTENANCE

Use the vacuum-cleaner with smooth spout regularly, don't brush






FIXING SYSTEMS AND ACCESSORIES

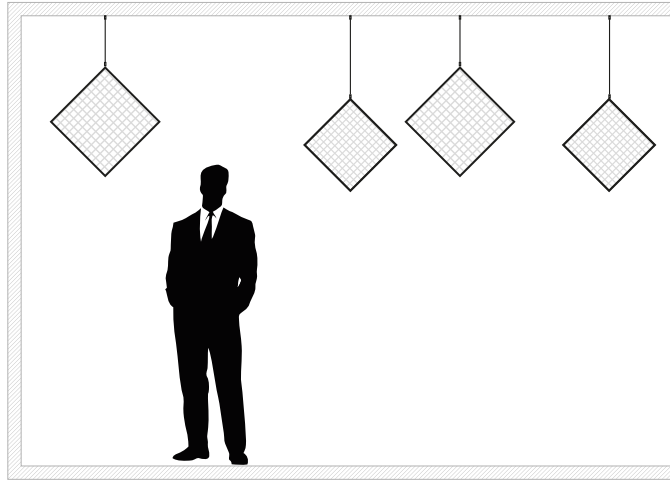

HANGING ELEMENT

- A** • Suspension kit (1 small 150cm cables, 1 adjustable safety hook)
- Suspension kit (1 small 400cm cables, 1 adjustable safety hook)
- B** • First panel ceiling-mounted suspension kit (1 small 200cm cables, 1 inserts for cable adjustment, 1 cable ties)



PRINTS

The images provided must necessarily have a 300 dpi resolution (lower resolutions will be accepted only after the evaluation of the technical office).

The print file can be provided in the following formats: eps, pdf, tiff, jpg, bmp.
Print colours and subjects will be evaluated in terms of feasibility by the technical office.

Price on request/ project basis for upholstered elements.