



## SCRIBA

Double-sided sound-absorbing panel upholstered in fabric. Installation on desk with clamps, put on special bases or on existing groove.

### COMPOSITION

#### Metal Framework

Inner frame in galvanised sheet metal 0,8 mm thick.

#### Sound-absorbing material

Inner sound-absorbing padding 50 mm thick realised in Basotect® melamine resin by Basf® (8,5-11,5 Kg/m³) or in Whisper® material by Stratocell® (25 kg/m³).


#### Fabric

Oeko-Tex certified removable fabric covering, 100% Polyester FR - (Tr Cs). Colours as in colour chart. High-resolution and custom fabric print with non-toxic and water-based inks resistant to washing, which do not alter the fabric sound-absorbing properties and elasticity.

### CERTIFICATIONS


- Sound absorption tests in compliance with UNI EN ISO 354
- Formaldehyde test: EN 717-1:2004 mg/mc < 0,01 – pm < 0,01
- Fire resistance tests
  - UNI EN 13501-01 Class B-s2, d0 - for the whole panel made of Basotect® melamine resin foam by Basf®
  - UNI EN 13501-01 Class B-s1, d0 - for the whole panel made of Whisper® by Stratocell®
  - American requirements USA ASTM E84-15b - for the whole panel made of Basotect® melamine resin by Basf®

### ACOUSTIC ABSORPTION

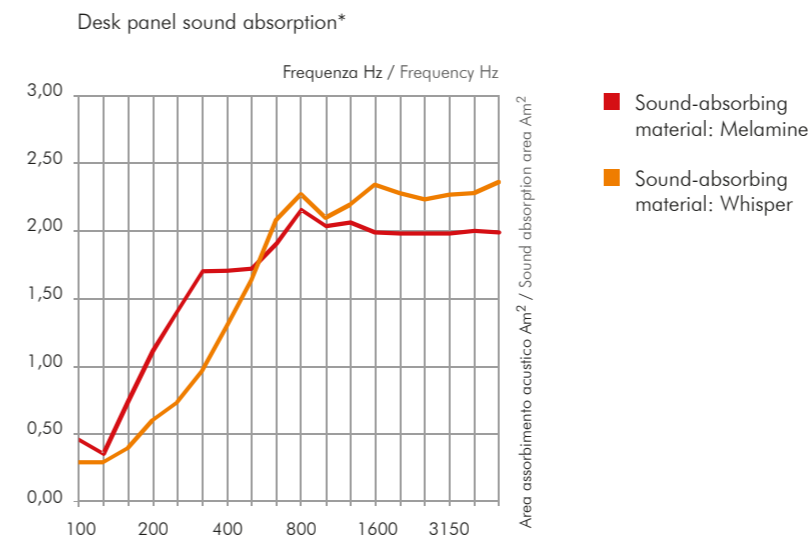

\*Sound absorption tests in compliance with UNI EN ISO 354 performed on 120 x 120 x 5 cm standard panel. The integration of lighting systems may alter the acoustic performance of the sound-absorbing panel.


### DIMENSIONS

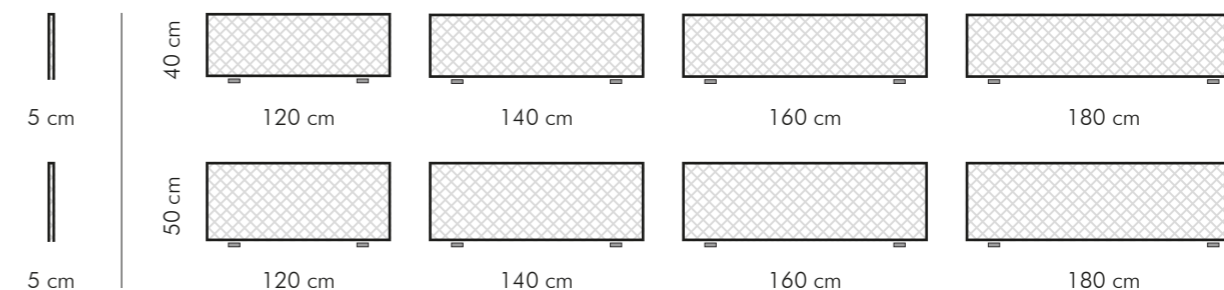


Special measures on request/ project basis

### MAINTENANCE

Use the vacuum-cleaner with smooth spout regularly, don't brush





FIXING SYSTEMS AND ACCESSORIES

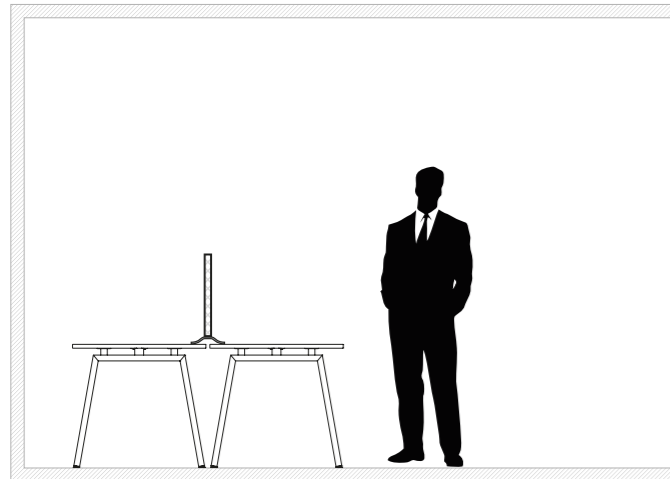


**BASES**

- 2 desk support bases painted in grey aluminium
- 2 desk support bases in satinized stainless steel

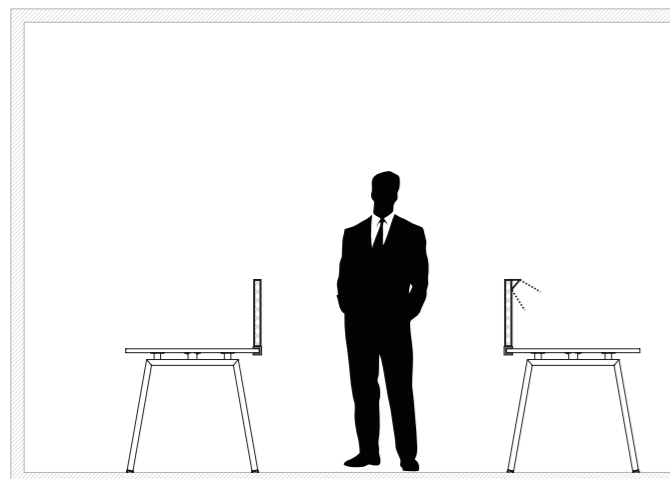

**CLAMP**

- Anchor kit for desk - 2 clamps
- Anchor kit for desk - 2 clamps + 2 spacers available

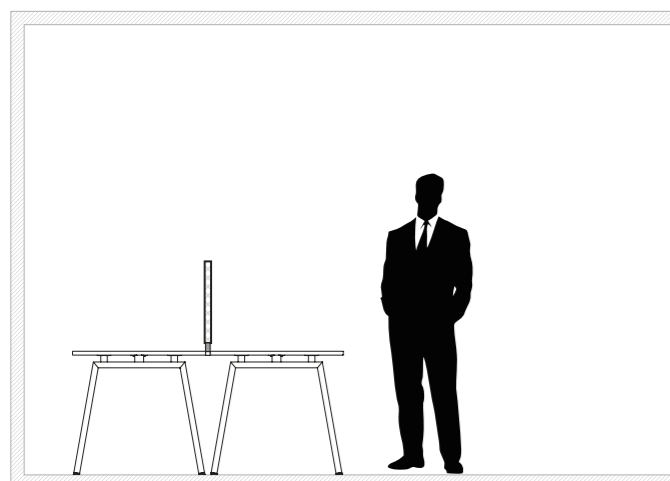

**ON EXISTING TRACK**

- Anchor kit for desk - 2 spacers (for fixing of the panels on existing track)



LED LIGHTING SYSTEMS

For further information or to request the LIGHTING TECHNICAL DATASHEET, please contact the technical office.

**TOUCH LED FOR SCRIBA MODEL WITH SUPPORT**

- Dimensions: 1200 mm | 1400 mm | 1600 mm | 1800 mm
- LED's/m: 240
- Power: 19,2 W
- Color: satinized stain-less steel
- Light color: 4000°K, 2700°K
- Certifications: CE



\* Integration of LED lighting system equal to the panel's length  
For information about removable cover of lighting system panels, please contact the technical office

PRINTS

The images provided must necessarily have a 300 dpi resolution (lower resolutions will be accepted only after the evaluation of the technical office).

The print file can be provided in the following formats: eps, pdf, tiff, jpg, bmp.  
Print colours and subjects will be evaluated in terms of feasibility by the technical office.

Price on request/ project basis for double-sided panels.